



Android

RTP Series

Android Desktop POS

- Intuitive touch performance due to anti interference PCAP Screen
- Available in HD & FHD Display options.
- 15.6" single screen or optional 2nd screen attachment 10.1
- Supports GMS & MDM for effective device management for large deployment


Specification

RTP -2 PLUS

RTP -3

Specification	RTP -2 PLUS	RTP -3	
Performance Parameters	CPU	RK3568 Quad-core Cortex-A55 2.0GHz	
	OS	Android 11/upgradable to 13	
	Memory	4GB RAM + 64 ROM	
Physical Parameters	Main Display	15.6" HD Capacitive Multi -Touch Screen, 1368*768 (Optional: FHD Screen)	15.6" FHD Capacitive Multi-Touch Screen, 1920*1080
	Customer Display	N/A	10.1" HD 1024x600
	USB	2 x USB3.0 + 3 x USB2.0	
	Serial Port	1 x RJ11	
	Cash Drawer Interface	1 x RJ12	
	Ethernet Interface	1 x RJ45	
	Audio	1 x 3.5 mm Headphone Jack with Speaker 1.5W	
	Power	1 x 5.5 mm DC Jack, 12 V, 4A	
	Key	Power Key for switch ON/OFF	
	Notification	Tone, LED	
	Dimensions	353.3 x 207.1 x 402.7 mm	
	Wireless Data Communication	Ethernet	TCP/IP 100M/1000M
Wi-Fi [Optional]		IEEE 802.11 b/g/n, 2.4GHz	
Bluetooth [Optional]		Bluetooth BT4.2 + BLE	
Environmental Parameters	Working Temperature	-0°C~ + 40°C	
	Storage Temperature	-20°C~ + 60°C	
	Humidity	5% ~ 95% RH (No Condensation)	
	ESD	± 8 kV air discharge, ±4 kV direct discharge	
Accessories	Standard	Power Adapter x 1 and Power cable	

Main Application Areas

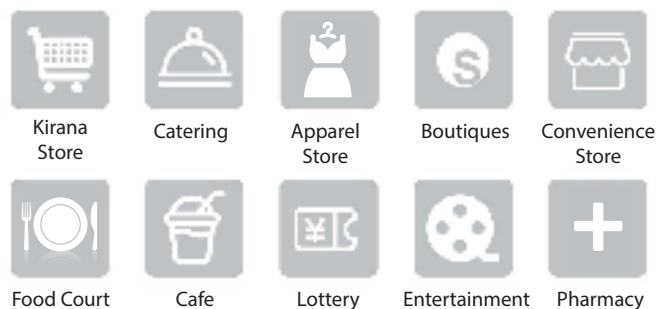

Certifications



VO.1_02062023

POSIFLEX TECHNOLOGY (INDIA) PVT. LTD.

#7/3, 3rd Floor, Jeet Dynasty, Swamy Vivekananda Rd, Nagavarapalya, Bengaluru, Karnataka 560093
 Tel : +91 80 4078 2700 | Mob : +91 9535432110
 Email : marketing@posiflexindia.com | www.posiflexindia.com

Authorized Distributor / Reseller