



Android

RTP Series

Android Desktop POS

- Intuitive touch performance due to anti interference PCAP Screen
- Available in HD & FHD Display options.
- 15.6" single screen or optional 2nd screen attachment 10.1
- Supports GMS & MDM for effective device management for large deployment


Specification

RTP -2 PLUS

RTP -3

Specification	RTP -2 PLUS	RTP -3		
Performance Parameters	CPU	RK3568 Quad-core Cortex-A55 2.0GHz		
	OS	Android 11		
	Memory	4GB RAM + 64 ROM		
Physical Parameters	Main Display	15.6" FHD Capacitive Multi-Touch Screen 1920*1080) (Optional:HD Screen)	15.6" FHD Capacitive Multi-Touch Screen 1920*1080) (Optional:HD Screen)	
	Customer Display (optional)	N/A	10.1" HD 1024x600	
	USB	2 x USB3.0 + 3 x USB2.0		
	Serial Port	1 x RJ11		
	Cash Drawer Interface	1 x RJ12		
	Ethernet Interface	1 x RJ45		
	Audio	1 x 3.5 mm Headphone Jack with Speaker 1.5W		
	Power	1 x 5.5 mm DC Jack, 12 V, 4A		
	Key	Power Key for switch ON/OFF		
	Notification	Tone, LED		
	Dimensions	353.3 x 207.1 x 402.7 mm		
	Wireless Data Communication	Ethernet	TCP/IP 100M/1000M	
		Wi-Fi	IEEE 802.11 b/g/n, 2.4GHz	
Bluetooth		Bluetooth BT4.2 + BLE		
Environmental Parameters	Working Temperature	-0°C~ + 40°C		
	Storage Temperature	-20°C~ + 60°C		
	Humidity	5% ~ 95% RH (No Condensation)		
	ESD	± 8 kV air discharge, ±4 kV direct discharge		
Accessories	Standard	Power Adapter x 1 and Power cable		

Main Application Areas

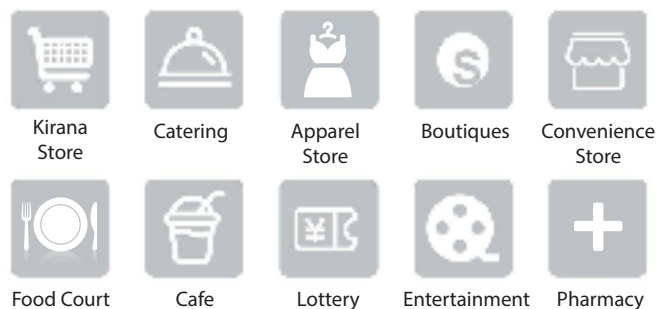

Certifications



VO.1_02062023

POSIFLEX TECHNOLOGY (INDIA) PVT. LTD.

#7/3, 3rd Floor, Jeet Dynasty, Swamy Vivekananda Rd, Nagavara, Bengaluru, Karnataka 560093
 Tel : +91 80 4078 2700 | Mob : +91 9535432110
 Email : marketing@posiflexindia.com | www.posiflexindia.com

Authorized Distributor / Reseller